

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
17 March 2005 (17.03.2005)

PCT

(10) International Publication Number
WO 2005/024150 A1

(51) International Patent Classification⁷:

E04C 5/16

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(21) International Application Number:

PCT/KR2004/001957

(22) International Filing Date: 4 August 2004 (04.08.2004)

(25) Filing Language:

Korean

(26) Publication Language:

English

(30) Priority Data:

10-2003-0063043

9 September 2003 (09.09.2003) KR

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant and

(72) Inventor: JOO, Dug-Sung [KR/KR]; 271-23 Sangin Parkvill., 402, Songsan1-dong, Mapo-gu, Seoul 121-848 (KR).


(74) Agent: MUN, Han-Seong; 814-5 Heungkuk Life Insurance Bldg., Yoksam-dong, Kangnam-ku, Seoul 135-931 (KR).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: JOINT EQUIPMENT FOR STEEL REINFORCING

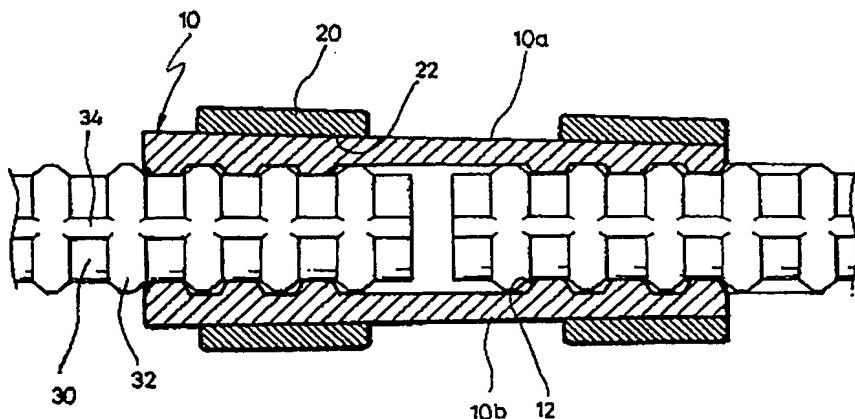

WO 2005/024150 A1

(57) Abstract: Disclosed herein is a reinforcing bar coupler which is intended to easily couple reinforcing bars in reinforced concrete work, thus reducing a construction period and construction costs. The reinforcing bar coupler includes a cover unit to cover reinforcing bars, and a locking bushing fitted over the cover unit to firmly couple the cover unit to the reinforcing bars. The cover unit has a circular hole therein, and includes two or more pieces to cover circumferences of the reinforcing bars. Outer surfaces of the pieces are inclined in the same direction to form a tapered surface, and annular grooves are provided on an inner surface of each piece to receive annular ribs in the annular grooves. The locking bushing comprises at least one locking bushing, and has on an inner surface thereof a tapered surface to correspond to the tapered surface of the cover unit.